


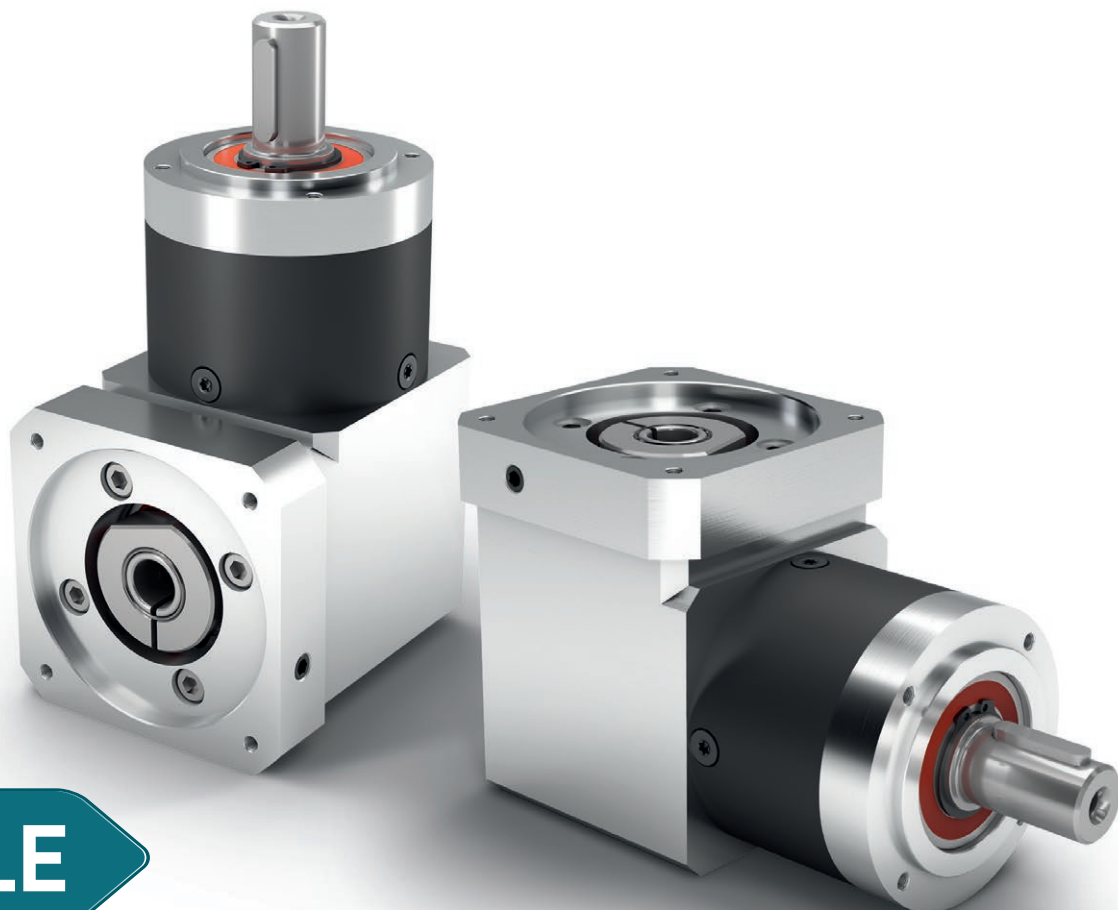


WPLE


The versatile right angle planetary gearbox with lower weight and appealing cost effectiveness

The **WPLE** is a consistent continuation of the benefits offered by the Economy Line. With its compact, but powerful design, it is ideal for dynamic multiple axis systems. Our right angle gearbox features lifetime lubrication, is easy to install, all this at an unrivalled price-performance ratio.


Nominal output torque **5 - 260 Nm**



Torsional backlash **11 - 28 arcmin**



Tilting moment **5 - 101 Nm**



Protection class **IP54**




Frame sizes

40

60

80

120

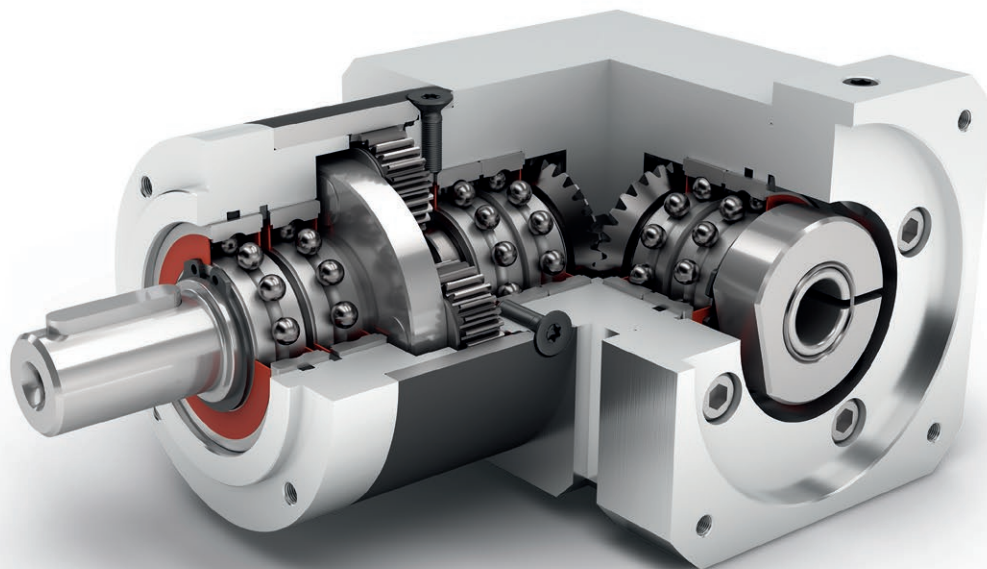


Economy Line



Right angle gearbox



Spur gear



Round type output flange



High ratio variety $i=3$ up to $i=512$



Equidirectional rotation



Bevel gear right angle stage



Low-friction deep groove ball bearings



Planet carrier in disc design

Code	Gearbox characteristics			WPLE040	WPLE060	WPLE080	WPLE120	p ⁽¹⁾
	Service life (L _{10h})	t _L	h	20,000				
	Service life at T _{2N} x 0.88			30,000				
	Efficiency at full load ⁽²⁾	η	%	95				1
				94				2
				88				3
	Min. operating temperature	T _{min}	°C (°F)	-25 (-13)				
	Max. operating temperature	T _{max}		90 (194)				
	Protection class		IP54					
	S Standard lubrication		Grease (lifetime lubrication)					
	F Food grade lubrication		Grease (lifetime lubrication)					
	L Low temperature lubrication ⁽³⁾		Grease (lifetime lubrication)					
	Installation position		Any					
S	Standard backlash	j _t	arcmin	< 21	< 16	< 13	< 11	1
				< 25	< 18	< 15	< 13	2
				< 28	< 21	< 17	< 15	3
	Torsional stiffness ⁽²⁾	c _g	Nm/arcmin (lb _t .in/ arcmin)	0.5 - 0.8 (4 - 7)	1.5 - 2.3 (13 - 20)	4.0 - 7.9 (35 - 70)	9.9 - 17.5 (88 - 155)	1
				0.7 - 1.0 (6 - 8)	2.2 - 2.7 (19 - 24)	6.9 - 9.6 (61 - 85)	16.4 - 20.5 (145 - 181)	2
				0.8 - 1.0 (7 - 9)	2.2 - 2.7 (19 - 24)	7.4 - 9.9 (65 - 88)	16.4 - 21.0 (145 - 186)	3
	Gearbox weight	m _G	kg (lb _m)	0.5 (1.1)	1.7 (3.7)	4.4 (9.7)	12 (26.5)	1
				0.6 (1.3)	1.9 (4.2)	5 (11.0)	14 (30.9)	2
				0.7 (1.5)	2.1 (4.6)	5.5 (12.1)	16 (35.3)	3
	S	Standard surface			Housing: Steel – heat-treated and post-oxidized (black)			
	Running noise ⁽⁴⁾	Q _g	dB(A)	68	70	73	75	
	Max. bending moment based on the gearbox input flange ⁽⁵⁾	M _b	Nm (lb _t .in)	2 (18)	5 (44)	10.5 (93)	26 (230)	

Output shaft loads			WPLE040	WPLE060	WPLE080	WPLE120	p ⁽¹⁾
Radial force for 20,000 h ⁽⁶⁾⁽⁷⁾	$F_{r20.000h}$	N (lb _r)	200 (45)	400 (90)	750 (169)	1750 (393)	
Axial force for 20,000 h ⁽⁶⁾⁽⁷⁾	$F_{a20.000h}$		200 (45)	500 (112)	1000 (225)	2500 (562)	
Radial force for 30,000 h ⁽⁶⁾⁽⁷⁾	$F_{r30.000h}$		160 (36)	340 (76)	650 (146)	1500 (337)	
Axial force for 30,000 h ⁽⁶⁾⁽⁷⁾	$F_{a30.000h}$		160 (36)	450 (101)	900 (202)	2100 (472)	
Maximum radial force ⁽⁷⁾⁽⁸⁾	F_{rStat}		200 (45)	700 (157)	1250 (281)	2000 (450)	
Maximum axial force ⁽⁷⁾⁽⁸⁾	F_{aStat}		240 (54)	800 (180)	1600 (360)	3800 (854)	
Tilting moment for 20,000 h ⁽⁶⁾⁽⁸⁾	$M_{K20.000h}$	Nm (lb _r .in)	5 (44)	14 (124)	31 (274)	101 (894)	
Tilting moment for 30,000 h ⁽⁶⁾⁽⁸⁾	$M_{K30.000h}$		4 (35)	12 (106)	27 (239)	86 (761)	

Moment of inertia			WPLE040	WPLE060	WPLE080	WPLE120	p ⁽¹⁾
Mass moment of inertia ⁽²⁾	J	kgcm ² (lb _r .in.s ² 10 ⁻⁴)	0.032 - 0.049 (0.283 - 0.434)	0.221 - 0.357 (1.956 - 3.160)	0.910 - 1.273 (8.054 - 11.267)	1.820 - 2.846 (16.108 - 25.189)	1
			0.032 - 0.048 (0.283 - 0.425)	0.222 - 0.350 (1.965 - 3.098)	0.916 - 1.232 (8.107 - 10.904)	1.855 - 2.773 (16.418 - 24.543)	2
			0.032 - 0.047 (0.283 - 0.416)	0.222 - 0.232 (1.965 - 2.053)	0.916 - 1.209 (8.107 - 10.701)	1.854 - 2.681 (16.409 - 23.729)	3

⁽¹⁾ Number of stages

⁽²⁾ The ratio-dependent values can be retrieved in Tec Data Finder – www.neugart.com

⁽³⁾ T_{min} = -40°C. Optimal operating temperature max. 50°C

⁽⁴⁾ Sound pressure level from 1 m, measured on input running at $n_1=3000$ rpm no load; $i=5$

⁽⁵⁾ Max. motor weight* in kg = $0.2 \times M_b$ / motor length in m

* with symmetrically distributed motor weight

* with horizontal and stationary mounting

⁽⁶⁾ These values are based on an output shaft speed of $n_2=100$ rpm

⁽⁷⁾ Based on center of output shaft

⁽⁸⁾ Other (sometimes higher) values following changes to T_{2N} , F_r , F_a , cycle, and service life of bearing. Application specific configuration with NCP – www.neugart.com

Output torques			WPLE040	WPLE060	WPLE080	WPLE120	i ⁽¹⁾	p ⁽²⁾
Nominal output torque ⁽³⁾⁽⁴⁾	T _{2N}	Nm (lb _f .in)	4.5 (40)	14 (124)	40 (354) ⁽⁵⁾	80 (708) ⁽⁵⁾	3	1
			6 (53)	19 (168)	53 (469) ⁽⁵⁾	105 (929) ⁽⁵⁾	4	
			7.5 (66)	24 (212)	67 (593) ⁽⁵⁾	130 (1151) ⁽⁵⁾	5	
			8.5 (75)	25 (221)	65 (575)	135 (1195)	7	
			6 (53)	18 (159)	50 (443)	120 (1062)	8	
			5 (44)	15 (133)	38 (336)	95 (841)	10	2
			16.5 (146) ⁽⁵⁾	44 (389) ⁽⁵⁾	130 (1151) ⁽⁵⁾	210 (1859) ⁽⁵⁾	9	
			20 (177) ⁽⁵⁾	44 (389)	120 (1062) ⁽⁵⁾	260 (2301) ⁽⁵⁾	12	
			18 (159) ⁽⁵⁾	44 (389)	110 (974)	230 (2036)	15	
			20 (177) ⁽⁵⁾	44 (389)	120 (1062)	260 (2301)	16	
			20 (177) ⁽⁵⁾	44 (389)	120 (1062)	260 (2301)	20	
			18 (159)	40 (354)	110 (974)	230 (2036)	25	
			20 (177)	44 (389)	120 (1062)	260 (2301)	32	
			18 (159)	40 (354)	110 (974)	230 (2036)	40	
			7.5 (66)	18 (159)	50 (443)	120 (1062)	64	
			20 (177)	44 (389)	110 (974)	260 (2301)	60	
			20 (177)	44 (389)	120 (1062)	260 (2301)	80	
			20 (177)	44 (389)	120 (1062)	260 (2301)	100	
			18 (159)	44 (389)	110 (974)	230 (2036)	120	
			20 (177)	44 (389)	120 (1062)	260 (2301)	160	
			18 (159)	40 (354)	110 (974)	230 (2036)	200	
			20 (177)	44 (389)	120 (1062)	260 (2301)	256	
			18 (159)	40 (354)	110 (974)	230 (2036)	320	
			7.5 (66)	18 (159)	50 (443)	120 (1062)	512	
Max. output torque ⁽⁴⁾⁽⁶⁾	T _{2max}	Nm (lb _f .in)	7 (62)	22 (195)	64 (566)	128 (1133)	3	1
			10 (89)	30 (266)	85 (752)	168 (1487)	4	
			12 (106)	38 (336)	107 (947)	208 (1841)	5	
			13.5 (119)	40 (354)	104 (920)	216 (1912)	7	
			10 (89)	29 (257)	80 (708)	192 (1699)	8	2
			8 (71)	24 (212)	61 (540)	152 (1345)	10	
			26 (230)	70 (620)	208 (1841)	336 (2974)	9	
			32 (283)	70 (620)	192 (1699)	416 (3682)	12	
			29 (257)	70 (620)	176 (1558)	368 (3257)	15	
			32 (283)	70 (620)	192 (1699)	416 (3682)	16	
			32 (283)	70 (620)	192 (1699)	416 (3682)	20	
			29 (257)	64 (566)	176 (1558)	368 (3257)	25	
			32 (283)	70 (620)	192 (1699)	416 (3682)	32	
			29 (257)	64 (566)	176 (1558)	368 (3257)	40	
			12 (106)	29 (257)	80 (708)	192 (1699)	64	
			32 (283)	70 (620)	176 (1558)	416 (3682)	60	
			32 (283)	70 (620)	192 (1699)	416 (3682)	80	3
			32 (283)	70 (620)	192 (1699)	416 (3682)	100	
			29 (257)	70 (620)	176 (1558)	368 (3257)	120	
			32 (283)	70 (620)	192 (1699)	416 (3682)	160	
			29 (257)	64 (566)	176 (1558)	368 (3257)	200	
			32 (283)	70 (620)	192 (1699)	416 (3682)	256	
			29 (257)	64 (566)	176 (1558)	368 (3257)	320	
			12 (106)	29 (257)	80 (708)	192 (1699)	512	

(1) Ratios (i=n₁/n₂)

(2) Number of stages

(3) Application specific configuration with NCP – www.neugart.com

(4) Values for feather key (code "A"): for repeated load

(5) Different service life: 10,000 h at T_{2N}

(6) 30,000 rotations of the output shaft permitted; see page 142

Output torques			WPLE040	WPLE060	WPLE080	WPLE120	i ⁽¹⁾	p ⁽²⁾
Emergency stop torque ⁽³⁾	T _{2Stop}	Nm (lb _r .in)	22.5 (199)	66 (584)	180 (1593)	360 (3186)	3	1
			28 (248)	86 (761)	240 (2124)	474 (4195)	4	
			35 (310)	80 (708)	220 (1947)	500 (4425)	5	
			26 (230)	80 (708)	178 (1575)	340 (3009)	7	
			27 (239)	80 (708)	190 (1682)	380 (3363)	8	
			25 (221)	70 (620)	170 (1505)	430 (3806)	10	
			33 (292)	88 (779)	260 (2301)	500 (4425)	9	2
			40 (354)	88 (779)	240 (2124)	520 (4602)	12	
			36 (319)	88 (779)	220 (1947)	500 (4425)	15	
			40 (354)	88 (779)	240 (2124)	520 (4602)	16	
			40 (354)	88 (779)	240 (2124)	520 (4602)	20	
			36 (319)	80 (708)	220 (1947)	500 (4425)	25	
			40 (354)	88 (779)	240 (2124)	520 (4602)	32	
			36 (319)	80 (708)	220 (1947)	500 (4425)	40	
			27 (239)	80 (708)	190 (1682)	380 (3363)	64	
			40 (354)	88 (779)	220 (1947)	520 (4602)	60	3
			40 (354)	88 (779)	240 (2124)	520 (4602)	80	
			40 (354)	88 (779)	240 (2124)	520 (4602)	100	
			36 (319)	88 (779)	220 (1947)	500 (4425)	120	
			40 (354)	88 (779)	240 (2124)	520 (4602)	160	
			36 (319)	80 (708)	220 (1947)	500 (4425)	200	
			40 (354)	88 (779)	240 (2124)	520 (4602)	256	
			36 (319)	80 (708)	220 (1947)	500 (4425)	320	
			27 (239)	80 (708)	190 (1682)	380 (3363)	512	

Input speeds			WPLE040	WPLE060	WPLE080	WPLE120	i ⁽¹⁾	p ⁽²⁾
Average thermal input speed at T _{2N} and S1 ⁽⁴⁾⁽⁵⁾	n _{1N}	rpm	5000	4500 ⁽⁶⁾	3500 ⁽⁶⁾	2850 ⁽⁶⁾	3	1
			5000	4500 ⁽⁶⁾	3550 ⁽⁶⁾	2950 ⁽⁶⁾	4	
			5000	4500 ⁽⁶⁾	3600 ⁽⁶⁾	3050 ⁽⁶⁾	5	
			5000	4500	4000 ⁽⁶⁾	3500 ⁽⁶⁾	7	
			5000	4500	4000 ⁽⁶⁾	3500 ⁽⁶⁾	8	
			5000	4500	4000	3500	10	
			5000	4500 ⁽⁶⁾	3250 ⁽⁶⁾	2950 ⁽⁶⁾	9	2
			5000	4500 ⁽⁶⁾	3850 ⁽⁶⁾	3050 ⁽⁶⁾	12	
			5000	4500	4000 ⁽⁶⁾	3500 ⁽⁶⁾	15	
			5000	4500	4000 ⁽⁶⁾	3450 ⁽⁶⁾	16	
			5000	4500	4000 ⁽⁶⁾	3500 ⁽⁶⁾	20	
			5000	4500	4000	3500 ⁽⁶⁾	25	
			5000	4500	4000	3500	32	
			5000	4500	4000	3500	40	
			5000	4500	4000	3500	64	
			5000	4500	4000	3500	60	3
			5000	4500	4000	3500	80	
			5000	4500	4000	3500	100	
			5000	4500	4000	3500	120	
			5000	4500	4000	3500	160	
			5000	4500	4000	3500	200	
			5000	4500	4000	3500	256	
			5000	4500	4000	3500	320	
			5000	4500	4000	3500	512	
Max. mechanical input speed ⁽⁴⁾	n _{1Limit}	rpm	18000	13000	7000	6500		

⁽¹⁾ Ratios (i=n₁/n₂)


⁽²⁾ Number of stages

⁽³⁾ Permitted 1000 times

⁽⁴⁾ Application-specific speed configurations with NCP – www.neugart.com

⁽⁵⁾ See page 142 for the definition

⁽⁶⁾ Average thermal input speed at 50% T_{2N} and S1

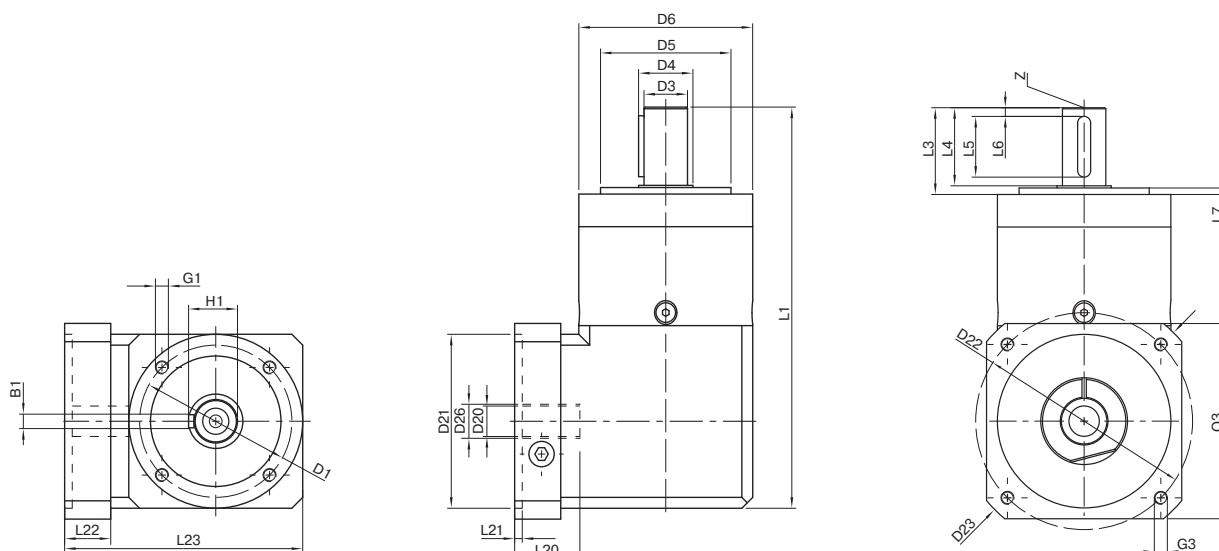

Drawing corresponds to a WPLE080 / 1-stage / output shaft with feather key / 19 mm clamping system / motor adaptation – 2-part – square universal flange / B5 flange type motor
All other variants can be retrieved in the Tec Data Finder at www.neugart.com

Geometry ⁽¹⁾			WPLE040	WPLE060	WPLE080	WPLE120	z ⁽²⁾	Code
Pitch circle diameter output	D1		34 (1.339)	52 (2.047)	70 (2.756)	100 (3.937)		
Shaft diameter output	D3	h7	10 (0.394)	14 (0.551)	20 (0.787)	25 (0.984)		
Shaft collar output	D4		12 (0.472)	17 (0.669)	25 (0.984)	35 (1.378)		
Centering diameter output	D5	h7	26 (1.024)	40 (1.575)	60 (2.362)	80 (3.150)		
Housing diameter	D6		40 (1.575)	60 (2.362)	80 (3.150)	115 (4.528)		
Mounting thread x depth	G1	4x	M4x6	M5x8	M6x10	M10x16		
Total length	L1		110 (4.331)	147 (5.787)	184 (7.244)	249.5 (9.823)	1	
			123 (4.843)	159.5 (6.280)	201.5 (7.933)	277 (10.905)	2	
			135.5 (5.335)	172 (6.772)	219 (8.622)	304.5 (11.988)	3	
Shaft length output	L3		26 (1.024)	35 (1.378)	40 (1.575)	55 (2.165)		
Centering depth output	L7		2 (0.079)	3 (0.118)	3 (0.118)	4 (0.157)		
Min. overall height	L23		62 (2.441)	86 (3.366)	110 (4.331)	146 (5.728)		
Clamping system diameter input	D26		More information on page 131					
Motor shaft diameter j6/k6	D20		The dimensions vary with the motor/gearbox flange. The input flange dimensions can be retrieved for each specific motor in Tec Data Finder at www.neugart.com					
Max. permis. motor shaft length	L20							
Min. permis. motor shaft length								
Centering diameter input	D21							
Centering depth input	L21							
Pitch circle diameter input	D22							
Motor flange length	L22							
Diagonal dimension input	D23							
Mounting thread x depth	G3	4x						
Flange cross section input	Q3	■						
Output shaft with feather key (DIN 6885-1)			A 3x3x18	A 5x5x25	A 6x6x28	A 8x7x40		
Feather key width (DIN 6885-1)	B1		3 (0.118)	5 (0.197)	6 (0.236)	8 (0.315)		A
Shaft height including feather key (DIN 6885-1)	H1		11.2 (0.441)	16 (0.630)	22.5 (0.886)	28 (1.102)		
Shaft length from shoulder	L4		23 (0.906)	30 (1.181)	36 (1.417)	50 (1.969)		
Feather key length	L5		18 (0.709)	25 (0.984)	28 (1.102)	40 (1.575)		
Distance from shaft end	L6		2.5 (0.098)	2.5 (0.098)	4 (0.157)	5 (0.197)		
Center hole (DIN 332, type DR)	Z		M3x9	M5x12.5	M6x16	M10x22		
Smooth output shaft								
Shaft length from shoulder	L4		23 (0.906)	30 (1.181)	36 (1.417)	50 (1.969)		B

⁽¹⁾ Dimensions in mm (in)

⁽²⁾ Number of stages